


CODE: SE20182C1, SE20192C0, SE20202C1, SE20212C1, 03.2001.0610,
SE20222C1, 03.2002.0610, SE20232C0, 03.2003.0610, 03.2004.0610


INSTALLATION
INSTRUCTIONS

IMPORTANT: please read these instructions before commencing installation and retain for future reference.

Components

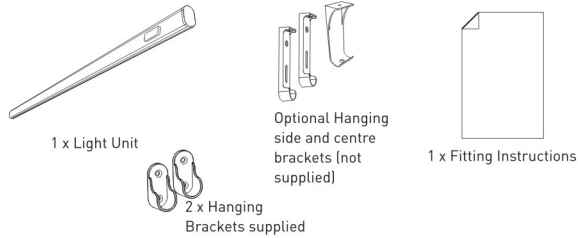

Tools required

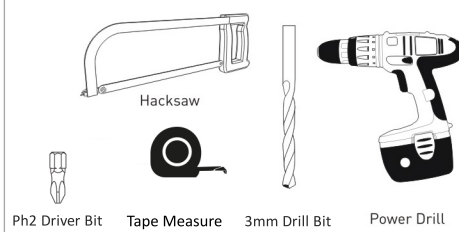

Important safety information

Please read these instructions carefully before attempting to install this product. It is advisable to keep these instructions in a safe place for further reference.

These products must not be modified, if any modifications are made, it may invalidate the warranty and may render the product unsafe. This product contains a rechargeable lithium-ion battery.

This product is for indoor use only. Keep out of moisture and use only in dry rooms.

- Do not Exceed the Maximum Load of 20Kg
- Only cut the unit following the instructions overleaf

Safety instructions


1. The light should be mounted onto a secure surface.
2. Suitable for furniture lighting.
3. When the lamp expires the fitting must be replaced.
4. Class III safety extra low voltage (SELV).
5. This fitting contains a rechargeable lithium-ion battery and will need to be recharged every 6-8 months (based on a usage of 2.5 minutes per day).
6. Position lights where they will not be exposed to steam or splashes etc.

Waste Electrical & Electronic Equipment (WEEE)
The Symbol on the product, or on the document accompanying the product, the crossed out wheeler bin symbol, indicated that this product may not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic waste.




RoHS Compliant ✓ CE


Installation instructions




Decide on Fixing Method. Measure the inside of the wardrobe to ascertain length of light unit required .

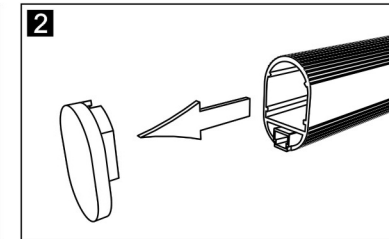


If the unit needs cutting, Remove and cap from left side only. IMPORTANT ensure sensor and on/off switch are to the right hand side facing out. DO NOT CUT FROM RIGHT HAND SIDE OF LIGHT UNIT. This will damage the internal wiring .




Saw light unit to correct length allowing for endcap and bracket length .

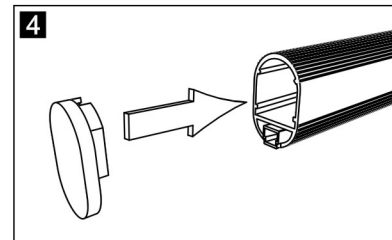


Replace end cap .




Drill M3 holes and screw horizontal bracket into side of wardrobe on both sides.



Slot light unit into bracket cradle .



HANGING OPTION 2 Secure vertical brackets to either the side or top of the wardrobe .

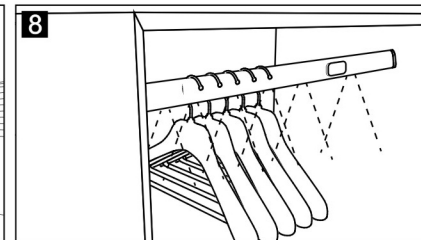

Please note that the maximum weight for the wardrobe rail is 20Kg .

Maintenance & Care

- Ensure that the power is disconnected prior to cleaning.
- To keep the finish of this product, wipe over with soft cloth periodically.
- Do not use harsh chemical solvents, it may dis-colour or damage the finish.

Unit 7 Speedwell Road, Whitwood, Castleford, West Yorkshire, WF10 5PY
www.sensio.co.uk

Note: Technical drawings for illustration purposes only. Sensio has the right to change any information without prior notice. Make sure you check all hole cut outs before work commences.