


Technical Specification Sheet

SALINA CH

Chrome 'U' neck single lever tap

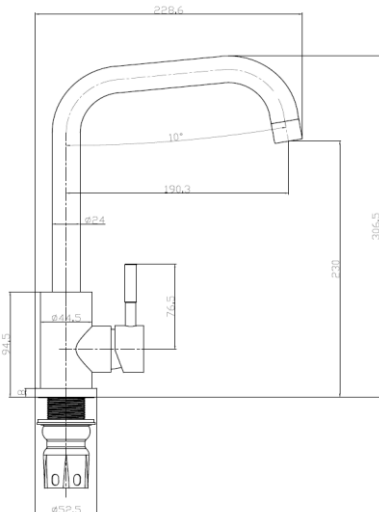

Specification

| | |
|--------------------|---------------------------|
| Finish | Chrome |
| Body | Stainless Steel |
| Fitting | fixation kits/inlet hoses |
| Connections | |
| Spout Rotation (°) | 360 |

Dimensions

| | |
|---------------------|----------------|
| Tap Hole Size (mm) | 35 |
| Height (mm) | 306 |
| Base Width (mm) | 52 |
| Reach (mm) | 190 |
| Weight (kg) | 1.5 |
| Box Dimensions (mm) | 380 x 240 x 60 |
| Packed Weight (kg) | 2 |

Bar Pressure

| | |
|--------------------------|-----|
| Minimum Pressure | 0.5 |
| Maximum Pressure | 5 |
| Maximum Static Pressure | 8 |
| Maximum Temperature (°C) | 70 |

Flow Rates

| @ 0.1 bar | @ 0.5 bar | @ 1 bar | @ 3 bar |
|-----------|-----------|---------|----------|
| n/a | 4.1 L/m | 6 L/m | 10.8 L/m |

Additional Features/Benefits

All pressures are in bar.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion of aerator (if supplied) or restrictors (supplied separately) will affect flow rate result.
 Performance details are based on trials under test conditions and are for guidance only,
 The manufacturer reserves the right to change product specification without prior notice.

EAN Number 5060916361843

Warranty

10 Year Warranty (Casting Only)

Care & Maintenance

Reginox recommends cleaning your tap regularly with non-abrasive cleaners. Warm, soapy water would be best.

Certifications